

The 222 ICLEAN ULTRA model was developed as an evolution of the 235 ICLEAN model.

The advantages in terms of suction performance are obvious, but above all the percentage of filtration of the sucked material is absolute, representing further safety for operators thanks to the installation of 2 HEPA D.O.P. secondary filters. The renewal of the design with the installation of the motors in the lower rear part allowed the lowering of the machine, facilitating its transport. The center of gravity in the lower part makes the machine stable when moving. The vacuum cleaner is able to intervene autonomously to restore the original filtering capacity.

**TECHNICAL FEATURES**



| MODELS                   | 222 IClean Ultra 230V | 222 IClean Ultra 110V |
|--------------------------|-----------------------|-----------------------|
| MOTORIZATION             | n°2 By-pass           | n°2 By-pass           |
| POWER                    | 2400 W                | 2200 W                |
| VOLTAGE                  | 230 V                 | 110 V                 |
| FREQUENCY                | 50/60 Hz              | 50/60 Hz              |
| AMPERAGE                 | 9,6 A                 | 12,4 A                |
| AIRFLOW                  | 340 m³/h              | 340 m³/h              |
| DEPRESSION               | 230 mBar              | 230 mBar              |
| Ø NOZZLE                 | Tangential Ø 60 mm    | Tangential Ø 60 mm    |
| BODY DIAMETER            | Ø 370 mm              | Ø 370 mm              |
| DIMENSIONS               | 80x53x118 cm          | 80x53x118 cm          |
| WEIGHT                   | 67 Kg                 | 67 Kg                 |
| FILTERING SYSTEM         | 222 IClean Ultra 230V | 222 IClean Ultra 110V |
| FILTER TYPE              | 2x Cartridge          | 2x Cartridge          |
| PRIMARY FILTER - SURFACE | 11.000 cm²            | 11.000 cm²            |
| FILTER MEDIA             | HEPA+PTFE             | HEPA+PTFE             |
| SECONDARY FILTER         | 19.000 cm²            | 19.000 cm²            |
| FILTER CLEANING          | Automatic             | Automatic             |
| COLLECTION SYSTEM        | 222 IClean Ultra 230V | 222 IClean Ultra 110V |
| CAPACITY                 | Longopac 20 m         | Longopac 20 m         |



Filter protection for cyclonic efficiency improvement and protection from abrasive materials

Fully automatic filter cleaning as standard




Suction always present and efficient

2 HEPA cartridge filters + PTFE membrane




Tangential dust inlet for better separation of dust from the filter

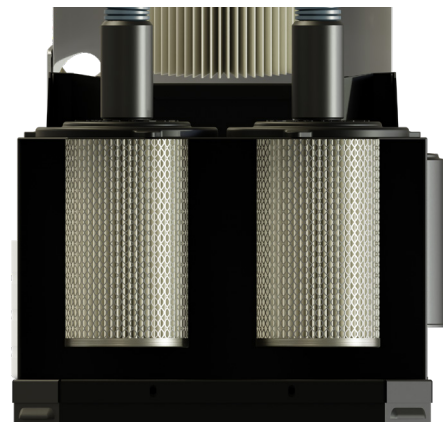

Easy barrel release system

Longopac® continuous bag collection system

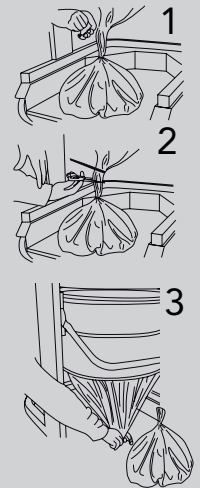

FINE DUST

222 ICLEAN Ultra

SLINE

Cleaning options

VIBRATION  
ICLEAN

