

INDUSTRIAL VACUUM CLEANERS

Silovac 600 AF - Heavy duty vacuuming silos with large capacity - INDUSTRIAL THREE PHASE



CEMENT WORKS AND CONSTRUCTION INDUSTRY




STEELWORKS AND FOUNDRIES



METALWORKING



SAND BLASTING

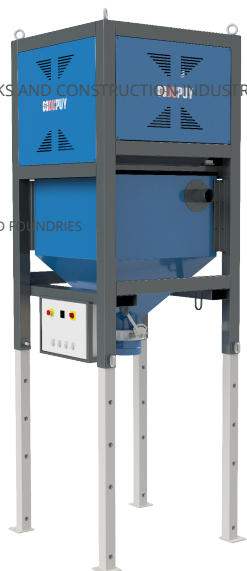

- ✓ Vacuum Silos designed to suction large quantities of material and discharge directly into big-bag or collection barrels.
- ✓ Material discharge by tilting flap, butterfly valve, guillotine system.
- ✓ Quick and simple big-bag bagging system.
- ✓ With forklift intakes for easy transport.
- ✓ 600lt collection capacity with maximum level detector
- ✓ High surface dust filter for fine dust with automatic shaker and compressor
- ✓ Mounted on telescopic chassis for easy transport



SUCTION UNIT

Voltage	V - Hz	400
Power	kW	18,5
Max waterlift	mmH2O	4.400
Continuous water lift	mmH2O	3.200
Max air flow	m ³ /h	1.350
Suction inlet	mm	100
Butterfly discharge valve	mm	250



FILTER UNIT

Filter Type	Star	
H14 Upstream absolute filters	H14 Standard (U15 optional)	
Surface - Diameter	cm ² -mm	70.000
Material - Efficiency	IEC 60335-2-69	M - PTFE
Air load on filter	m ³ /m ² /h	190
Cleaning system	SELF CLEAN	



COLLECTION UNIT

Discharge system	Big-bag system	
Capacity	lt.	600
Floating device	No	



VOLUME

Dimensions	cm	125 x 140 x 250h
------------	----	------------------



SUCTION UNIT

Suction is developed by a powerful side channel blower with direct coupling between the fan and the motor and no transmission system, making it completely maintenance free and fit for continuous duty.



FILTER UNIT

The filter is equipped with a semi-automatic cleaning system controlled by the operator. A pneumatic cylinder shakes the bag filter in rapid, vertical movements causing the accumulated dust and material to fall off. This way, the operator can decide when to switch off the unit and clean the filter without being tied to pre-set cleaning times and cycles.



COLLECTION UNIT

The material is discharged directly into big-bags.



OPTIONALS

- ✓ LOC/REM remote control
- ✓ Radio control (Start and Stop) including 2 remotes
- ✓ Mechanical electric vibrator on the hopper cone
- ✓ Explosion safety panel DN400
- ✓ Explosion relief valve with flame absorber ENV420
- ✓ Cut-off isolation flap valve Atex Z22 D100